


SL 30 (50Hz)

No. of vanes 7	Capacity 5,4-9,0 m ³ /h
Outlet connection diameter (inside threaded) 2"	Delivery head 209 - 64 mt
Pump outside diameter 95 mm	Shaft diameter (Hexagonal) 11 mm




The hydraulic working characteristics have been taken with water at 15 °C, at the atmospheric pressure of 1 bar and specific gravity is 1 gr/cm³

Technical Specifications

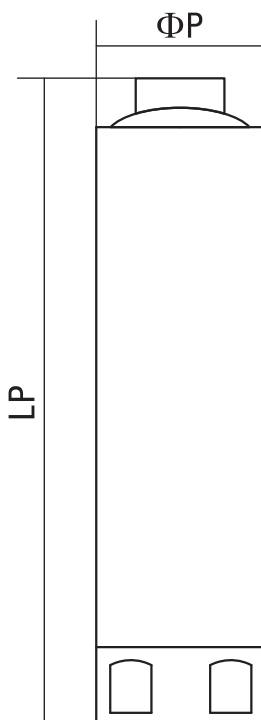

Diffuser : Noryl	Top Diffuser : Noryl
Impeller : Noryl	Pump shaft : Stainless steel (AISI 304)
Coupling : Stainless steel (AISI 304)	Suction case : Stainless steel (AISI 304)
Strainer : Stainless steel (AISI 304)	Top bracket : Stainless steel (AISI 304)
Valve cap : Stainless steel (AISI 304)	Rotation : CCW
Wear box : Stainless steel (AISI 304)	Revolution : 2.900 rpm



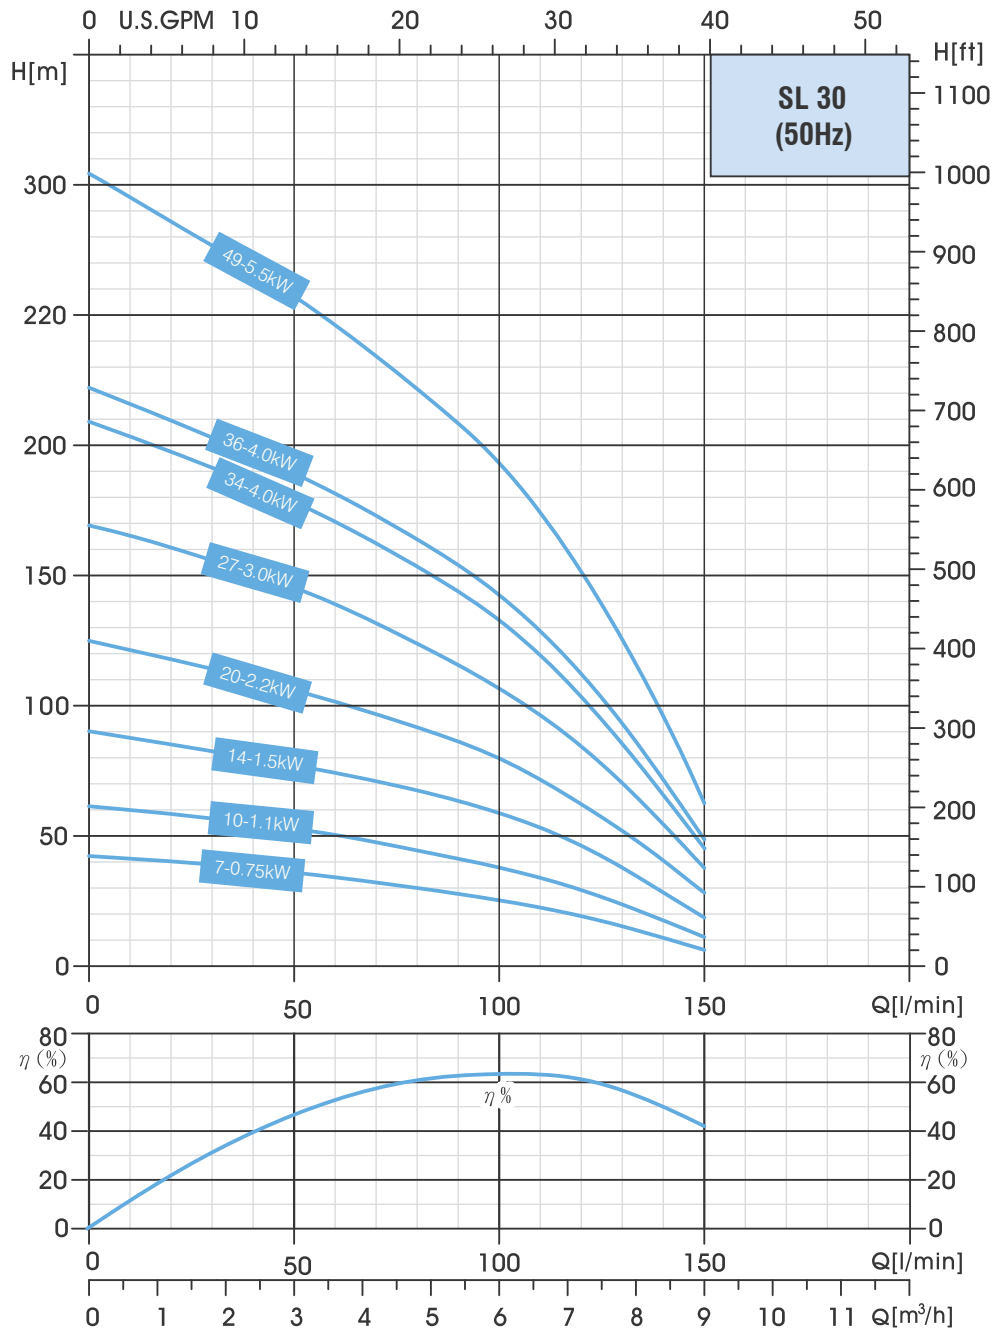

Dimensions and Performance Table

Type	Stages	Motor			Pump			m³/h	0	5.4	6	6.6	7.2	7.8	9.0
		Type	kW	HP	L(mm)	DN (RPT or NPT)	Kg								
SL 30-7	7	4"	0.75	1.00	390	2"	3.7	l/min	0	90	100	110	120	130	150
SL 30-10	10	4"	1.10	1.50	483	2"	4.6	Head (m)	42	28	25	22	19	15	8
SL 30-14	14	4"	1.50	2.00	607	2"	5.7		62	41	38	34	29	23	12
SL 30-20	20	4"	2.20	3.00	831	2"	7.5		90	63	59	53	46	37	19
SL 30-27	27	4"	3.00	4.00	1048	2"	9.6		125	86	80	71	62	52	29
SL 30-34	34	4"	4.00	5.50	1257	2"	11.6		169	115	107	96	84	70	39
SL 30-36	36	4"	4.00	5.50	1318	2"	12.2		208	143	132	120	103	86	48
SL 30-49	49	4"	5.50	7.50	1802	2"	15.9		221	154	143	127	112	93	49
									302	209	193	171	151	123	64