




**THE V110 KSM POLYMER  
VOLUMETRIC WATER METER RANGE**

**The V110 KSM Polymer Volumetric Water Meter is Africa's favourite domestic water meter. Its accuracy, long service life, low maintenance and tamper-proof features have contributed to its success throughout Africa, Latin America and indeed the world. The V110 KSM Polymer Volumetric Water Meter is the trusted, proven meter for cost-effective metering.**


**The V110 KSM Volumetric Water Meter**

**Unique Features:**

Compensating counter ramp ensures alignment of geartrain & counter when polymer meter body flexes due to pressure shocks. Path of water flow eliminates turbulence in geartrain and counter area. Geartrain remains clean and meter maintains ability to measure low flow rates.

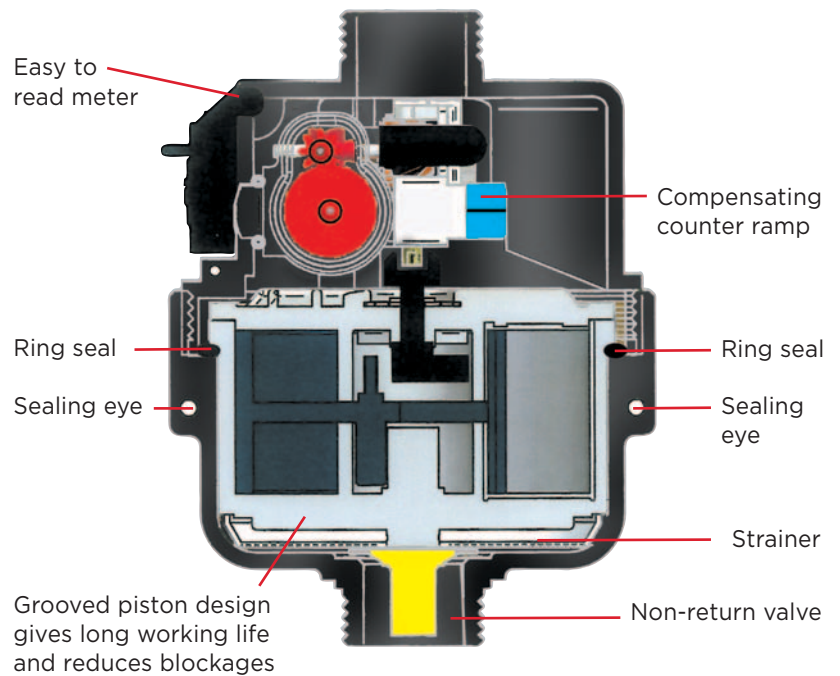

**Revolutionary Grooved Piston**



Meter stoppages are substantially reduced, durability enhanced and performance improved as a result of a uniquely-designed grooved piston within the meter measuring chamber, increasing applications flexibility.

**Relative motion of the grooved piston**

Its action, with the stationary chamber wall, creates small flow eddies which hold solids in suspension until flushed out, reducing meter stoppages.



15mm / 114



15mm / 165



20mm / 114



20mm / 165



25mm / 198

**Available in sizes from 15mm to 25mm, with flow rates of between 5.7 l/h to 7 m<sup>3</sup>/h, V110 KSM meters offer unrivalled performance to SANS 1529-1: 2006, ISO 4064 Class C for 15mm to 25mm and Class D for the 20mm (114). In addition, models can provide valuable management information via a probe pulse unit upgrade.**

- The world's biggest-selling domestic water meter
- Optimum accuracy and performance at all times, in any position
- Revolutionary low revving grooved piston for improved durability and performance
- Durable tamperproof construction
- Full range of sizes from 15mm to 25mm
- Water temperatures up to 50°C
- Maximum working pressure of 16 bar
- Standard pulse output providing access to management information (reed switch optional extra)

### **Unrivalled accuracy in any position, for any flow**

Due to the volumetric rotary piston measurement principle, the V110 KSM range can achieve the highest levels of reading accuracy even at the lowest flow rate. The meter can be installed in any position ie: horizontally, vertically or inclined pipelines, maintaining optimum performance with no loss of accuracy.

**Note: The 20mm (114) is approved to Class D accuracy (Only available on request).**

### **Robust, leak-proof construction**

The use of advanced engineering plastics for the meter's measuring chamber significantly reduces wear and helps maintain reliable, accurate measurement

over all operating conditions. Solid particles are gathered by a large surface area strainer, further preventing damage, and its advanced design ensures that partial obstruction of the strainer will have no ill effect on the accuracy of the meter's registration. A body ring seal between the measuring chamber and meter body ensures that internal leaks which could by-pass the measuring chamber are eliminated.

### **Easy to read**

The all-in-one counter and gear unit is fully sealed, liquid filled using a vacuum and offers simple, straight-reading presentation. The number rollers are completely immersed in a lubricating non-toxic liquid, and a sac attached to the counter casing acts as a balancing membrane, ensuring the pressure of the liquid in the counter equals that of the external water. The counter window is inside the meter body in the direction of flow for simplified reading.

### **Tamperproof operation**

The V110 KSM offers unrivalled resistance to illegal tampering: its unique conical body-half design eliminates the risk of disassembly whilst in service and the mechanically driven cyclometer-type counter is resistant to magnetic interference. Non-return valve provides further protection against outside interference, preventing the meter being operated in the reverse direction to reduce the reading. This restrictor cannot be removed without opening the meter and destroying the seal.


### **Reliability guaranteed**

Every V110 KSM meter is individually tested over its flow range before despatch, and is manufactured from the highest quality materials ensuring maximum resistance to wear and corrosion.

# V110 Specifications Class C to SANS 1529-1: 2006


Meter size (mm)			15	20	20	25
Accuracy Test			Class C	Class D	Class C	Class C
Overload flow rate	qs±2%	m <sup>3</sup> /h	3.0	5.0	5.0	7.0
Permanent flow rate	qp±2%	m <sup>3</sup> /h	1.5	2.5	2.5	3.5
Transitional flow rate	qt±2%	l/h	22.5	28.75	37.5	52.5
Minimum flow rate	qmin±5%	l/h	15.0	18.75	25.0	35.0
Starting flow (approximate)		l/h	5.7	9.5	9.5	13.2
Output pulse		litre/pulse	0.5	0.5	0.5	5.0
Meter diameter		mm	86	86	86	104
Meter length		mm	114 or 165	114	165	198
Weight - Meter only (approximate)		kg	0.40	0.42	0.42	0.66

## Typical Flow Graph

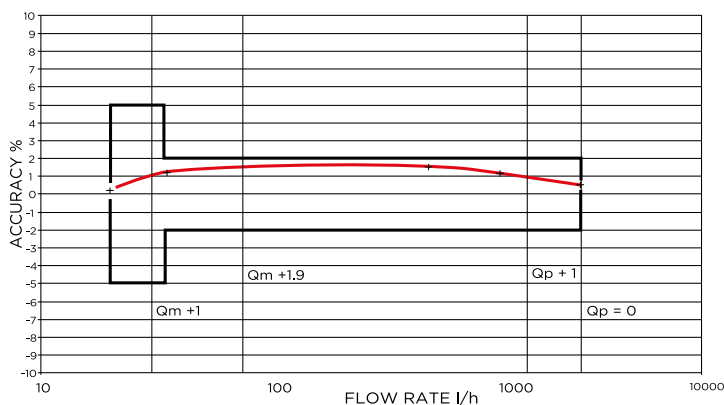

Pressure drop curves (Typical)  
15, 20 & 25mm KSM water meters

## Pressure Drop Graph

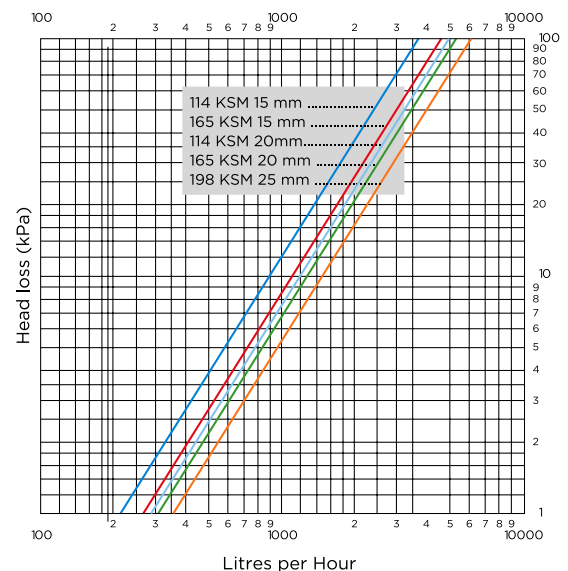

## Typical Specification:

15mm V110 KSM Polymer water meter of the semi-positive rotary piston type, 114mm long with non-return valve, fitted with a straight-reading counter and fixed one pulse per 1/2 litre output facility registering in m<sup>3</sup> and approved under the Trade Metrology Act and Regulations

and to SANS 1529-1: 2006 Class C specifications. manufacturing fault, but does not cover wear and tear considered normal at the locality of installation. Polymer meter warranty 3 years from date of manufacture.

## Warranty

All goods are tested and inspected prior to despatch. In the event of defects resulting from faulty workmanship or materials, such goods will be replaced/repared at our discretion, free of charge at the factory, but no responsibility will be accepted for any direct or consequential damage.

This warranty covers the malfunction of a correctly installed item due to a manufacturing fault, but does not cover wear and tear considered normal at the locality of installation. Polymer meter warranty 12 months from date of delivery, which shall be the date on the invoice.

## Elster Kent Metering (Pty) Ltd

PO Box 201, Auckland Park 2006

<b>JOHANNESBURG</b>	Tel: (011) 470-4900	Fax: (011) 474-0175
<b>DURBAN</b>	Tel: 082 455 3553	
<b>CAPE TOWN</b>	Tel: (021) 511-8465/6	Fax: (021) 511-8446
<b>BLOEMFONTEIN</b>	Tel: (051) 430-2603	Fax: (051) 430-6165
<b>PORT ELIZABETH</b>	Cell: 082 458-3439	

© 2015 Honeywell International Inc.  
All Rights Reserved. The company's policy is one of continuous improvement and the right is reserved to modify the specifications without notice.

[www.elstermetering.co.za](http://www.elstermetering.co.za)  
[www.honeywell.com](http://www.honeywell.com)

**Honeywell**